

BTech[®]
AV Mounts

SYSTEM V[™]

Mounting Solutions
for Security Systems



Introduction to System V

Welcome to B-Tech AV Mounts' Introduction to the System V Range of mounting solutions, a specialist range of products designed to install security cameras into public spaces such as retail, transportation, corporate, government and leisure environments.

System V is a collection of mounting components designed around the use of Ø38mm poles to install dome cameras and flat screens from the ceiling. Components include a ceiling mount, poles; available in three lengths (1m, 2m and adjustable drop) that can also be joined using an external pole joiner, a collar for attaching screen mounts, camera mounting plates for small and large dome cameras and a 1.5" threaded adaptor for equipment that conforms to the NPT standard. Also included is an adaptor to use ceiling mounts from B-Tech's System 2 range, allowing CCTV installs using specialist mounts for I-Beams, Purlins and Truss systems.

The component range allows installers to tailor a solution specific to the needs of any project by creating a custom solution out of a range of stocked components. Alternatively, we have created a range of complete kits to cover some of the most popular requirements making it quick and straightforward to choose and order an ideal solution.

For pricing information, please speak to your local B-Tech AV Mounts representative or contact us via email at info@btechavmounts.com



AVIXA Member

CEDIA
MEMBER

A
user group

Club du
Digital
Media

D DIGITAL
SIGNAGE
FEDERATION

S Singapore Manufacturing
Federation
新加坡製造商總會

Introduction to System V

pg.2

Component Range

pg.4-13

Ceiling Mounts
For Security Cameras

pg.14-21

Ceiling Mounts
For Flat Screens

pg.22-27

Surveillance Room Solutions

pg.28-29

BTech
AV Mounts

SYSTEM V



SYSTEM X



View our 2025 Full Line

Product Catalogue

Click to view online or visit our catalogues page

Click to
view now



SYSTEM TMV

Component Range



System V is made up of a core group of individual stock components that can be ordered so that users can tailor a bespoke solution that will suit the needs of the install perfectly.

Using the ceiling mount, poles can be fixed to the ceiling and then a variety of AV equipment such as dome cameras and flat screens can be securely attached using the various mounting plates, adaptors or collars. For complete kits containing a full set of components for common requirements, see page 10.

For convenience, complete mounting solutions are also available to order - *See page 11*

Mount CCTV Dome Cameras



Use Collars to attach Flat Screen Mounts



Build to your requirements



SYSTEM V™

Quick-Start Guide:

Camera Mounts

Example CCTV Installation

This quick start guide demonstrates the steps to create an example CCTV Installation using the System V range. Customise your installation as desired using our diverse range of System V compatible mounts.

for more information or to see how the range can be used in alternative installations, please get in touch with us a technical@btechavmounts.com

Optional:

Add a screen mount

Step 4:

Choose a Collar

ACCESSORY COLLAR

PRODUCT CODE	DESCRIPTION
BT5952	Ø38mm Accessory Collar

Step 5:

Choose a Screen Mount

SCREEN MOUNT

PRODUCT CODE	DESCRIPTION
BT7510	Small Flat Screen Mount
BT7511	Small Flat Screen Mount with Tilt
BT7532	Medium Flat Screen Mount*
BT7523	Medium Flat Screen Mount with Tilt

*x2 BT5952 Accessory Collars required for use with BT7532

Optional Extras
STEP 5



Optional Extras
STEP 4



Step 1:

Choose a Ceiling Mount

SYSTEM V CEILING MOUNT

PRODUCT CODE	DESCRIPTION
BT5920	Fixed Ceiling Mount

*Alternatively use **BT5950 Pole Adaptor** to mount **System 2 Ceiling Mounts** (see below)

or use:

POLE ADAPTOR

PRODUCT CODE	DESCRIPTION
BT5950	Ø38mm Pole Adaptor

or use:

SYSTEM 2 CEILING MOUNT

PRODUCT CODE	DESCRIPTION
BT7808	Ceiling Mount with Tilt*
BT7012	Purlin Mount*
BT7017	I-Beam / Girder Mount*
BT7825	Truss Clamp*

Step 2:

Choose a Pole

Ø38MM POLE

PRODUCT CODE	LENGTH*
BT5935-100	1m Pole
BT5935-200	2m Pole

*Pole Joiners can be used to extend poles, simply select additional pole to be joined after selecting a joiner below

POLE JOINER

PRODUCT CODE	DESCRIPTION
BT5924	External Pole Joiner

Step 3:

Choose a Camera Mount

CAMERA MOUNT

PRODUCT CODE	DESCRIPTION
BT5910	Dome Camera Mount
BT5911	Large Camera Mount
BT5951	NPT Adaptor

STEP 3



Step 1

Choose A Pole Mount

Ceiling Mounts



BT5925



BT5920



BT5921



BT5922

Ceiling Mount Adaptor



BT5950

SYSTEM 2™

BT7825

Truss Clamp



BT7012

Purlin Mount



Step 2

Choose A Pole

Ø38mm Poles



Finishing Ring



BT5953

BT5935-100 (1m)

BT5935-200 (2m)

BT5935-300 (3m)

Pole Joiners



Join x2 **BT5935**
Ø38mm Poles to
extend the drop of **Sys-**
tem V installations



BT5923

Step 3

Choose A Collar Or Mount

Ø38mm Double Collar



BT5952


Security Camera Mounts



BT5909



BT5910

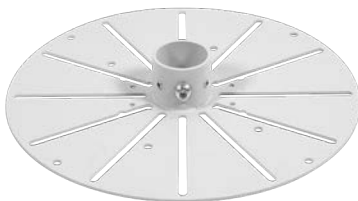

BT5911

NPT Adaptor



Attaches a NPT 1.5" Security Camera to a System V Pole

BT5951

Step 4

Choose Screen Interface Kit

Flat Screen Mounts



BT7510



BT7511



BT7523



BT7518



BT7532

Complete Kits

Off-The-Shelf Kits

Flat Screen Mounts



BT5960

BT5961

BT5962

BT5963

BT5964



BT5965

BT5970

BT5971

BT5972

■ BT5920

Fixed Ceiling Mount


for use with Ø38mm Poles



■ BT5921

Ceiling Mount with Tilt


for use with Ø38mm Poles



■ BT5922


Girder / Purlin Mount

for use with Ø38mm Poles



BT5925

Adjustable Drop Ceiling Mount

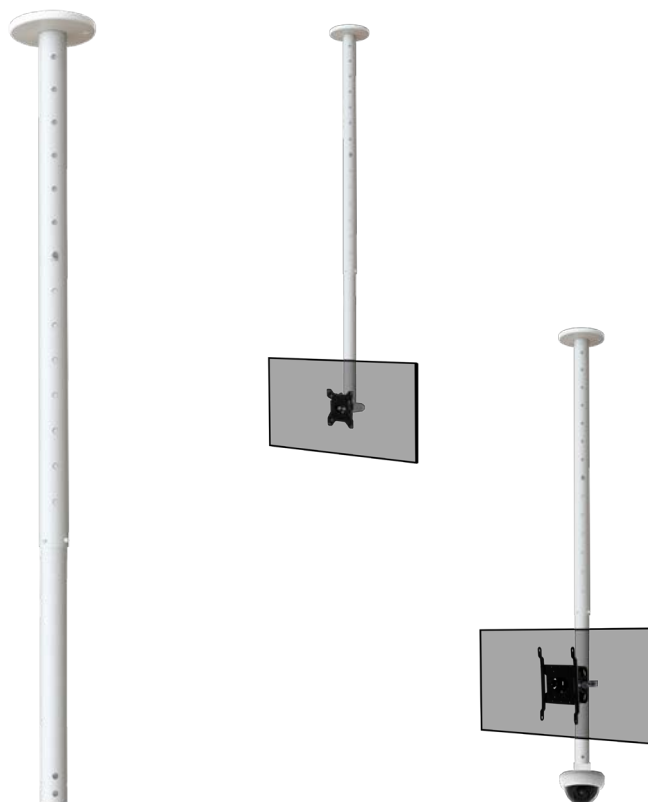**BT5935**

Ø38mm Pole

**BT5935-100**
1 metre length**BT5935-200**
2 metre length

■ BT5950

Ø38mm Pole Adaptor
for use with System 2
Ø50mm Ceiling Mounts



BT7017
I-BEAM / GIRDER
MOUNT



BT7017
PURLIN MOUNT



BT7825
TRUSS CLAMP



BT7808
CEILING MOUNT
WITH TILT



■ BT5923

Internal Pole Joinder
for use with Ø38mm Poles



■ BT5909


Small Dome Security Camera Mount
for use with Ø38mm Poles

**■ BT5910**

Dome Security Camera Mount
for use with Ø38mm Poles

**■ BT5911**

Large Dome Security Camera Mount
For use with Ø38mm Poles

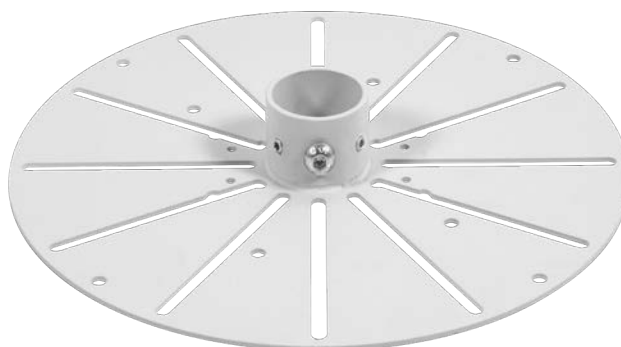

■ BT5951

NPT Adaptor

for use with Ø38mm Poles



1.5" THREAD
FOR NPT
COMPATIBLE
EQUIPMENT



Attach an NPT 1.5" security camera
to a System V pole



■ BT5952

Accessory Collar

for use with Ø38mm Poles



MOUNT A
RANGE OF
SCREEN
MOUNTS



■ **BT5953****False Ceiling Trim**

for use with Ø38mm Poles



Improves the aesthetic of mounts that pass through a suspended ceiling

**System V Ceiling & Camera Mounting Solutions**

Model Number	Total Max Weight	Max Load	Max Load Mounting on 1 Side of Pole	Tilt	Dimensions	Camera Fixing Dimensions	Plate Diameter
BT5920	75kg	N/A	N/A	N/A	Ø120 x 103mm	N/A	N/A
BT5960-AD	75kg	N/A	25kg*	90°	150 x 70 x 63.5mm	N/A	N/A
BT5961-FD	70kg	N/A	40kg*	90°	330 x 151 x 80mm	N/A	N/A
BT5961-AD	25kg	N/A	25kg*	N/A	Ø120 x 833-1472mm	N/A	N/A
BT5962-FD	N/A	5kg	51mm - 90mm	N/A	N/A	N/A	120mm
BT5962-AD	N/A	5kg	51mm - 127.5mm	N/A	N/A	N/A	144mm
BT5972-AD	N/A	5kg	51mm - 251.5mm	N/A	N/A	N/A	268mm

*Max load if mounting on only one side of the pole. Max load of ceiling mount increases when mounting on both sides or the bottom of the pole.

SYSTEM VTM Ceiling Mounts for Security Cameras



Complete mounting solutions designed to seamlessly install security cameras, flat screens, and CCTV systems in various public spaces, including retail, transportation, corporate, government, and leisure environments

Constructed using System V components, we have created a range of ready-made ceiling mount kits designed to cover some of our most popular installations. These kits offer options for pole mounting single dome cameras or a combination of both camera and screen. Tailored for use with System V's Ø38mm poles, these solutions are available in two lengths, utilising either a 1m, 2m or adjustable drop length pole.

For a more custom approach, individual components within the System V range are available (See page 5). Poles can be joined together for an extended ceiling drop, and an adaptor is offered to enable the use of these components with B-Tech's versatile System 2 range. This flexibility allows CCTV installations onto I-Beams, Purlins, and Truss systems.

For complete product specifications, including technical drawings and colour options, scan each products QR code to view the online page.



Key Features

- Complete mounting kits to mount a dome security camera or camera and screen
- Available in a choice of two different drop lengths and adjustable drop length
- Multiple grub screws allow micro-adjustment of the pole to ensure a perfectly angled drop
- Safety bolts ensure a pole and camera mount are securely joined for a safe installation
- Includes cover plates for a smart installation
- Integrated cable management allows cables to pass through the centre of the pole
- Components are also available to order individually

Dome Camera Ceiling Mounts



Camera and Screen Ceiling Mounts



BT5960

CCTV CEILING MOUNT FOR SMALL - MEDIUM DOME SECURITY CAMERAS


The BT5960 is a CCTV ceiling mount for small to medium-sized dome security cameras and is available with a 1 or 2 metre ceiling drop. Integrated cable management allows cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories such as a flat screen can be added with the use of a $\varnothing 38\text{mm}$ accessory collar (BT5952) and compatible screen mount.

SPECIFICATIONS

Max load	5kg
BT5960-FD100 drop length	1036mm
BT5960-FD200 drop length	2036mm
Camera fixing dimensions	51mm to 127.5mm
Colour	White

FEATURES

- 1 Mounts a small to medium sized dome CCTV camera
 - 2 Integrated cable management through the top side of the ceiling mount
 - 3 Multiple mounting points for cameras with fixing points up to 127.5mm apart
 - 4 Component range also available for custom installations
- Available in a choice of two different drop lengths
 - Multiple grub screws allow micro-adjustment of the pole to ensure a perfectly angled drop
 - Safety bolts ensure pole and camera mount are securely

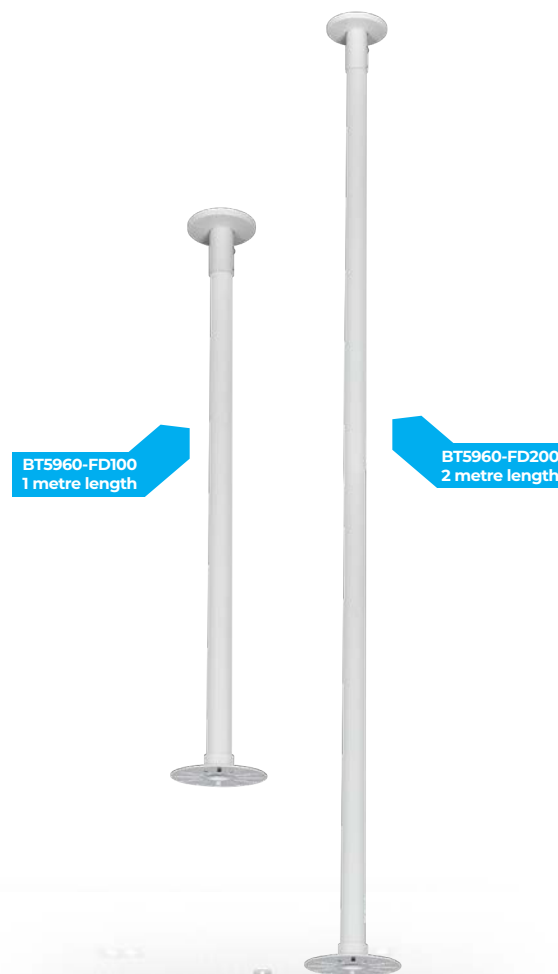

BT5961

CCTV CEILING MOUNT FOR LARGE DOME SECURITY CAMERAS

The BT5961 is a CCTV ceiling mount for large dome security cameras and is available with a 1 or 2 metre ceiling drop. Integrated cable management allows cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories such as a flat screen can be added with the use of a $\varnothing 38$ mm accessory collar (BT5952) and compatible screen mount.

SPECIFICATIONS

Max load	5kg
BT5961-FD100 drop length	1036mm
BT5961-FD200 drop length	2036mm
Camera fixing dimensions	51mm to 251.5mm
Colour	White

FEATURES

- 1 Mounts a large sized dome CCTV camera
 - 2 Integrated cable management through the top side of the ceiling mount
 - 3 Multiple mounting points for cameras with fixing points up to 251.5mm apart
 - 4 Component range also available for custom installations
- Available in a choice of two different drop lengths
 - Multiple grub screws allow micro-adjustment of the pole to ensure a perfectly angled drop
 - Safety bolts ensure pole and camera mount are securely joined



BT5961-FD100
1 metre length

BT5961-FD200
2 metre length

BT5962

CCTV CEILING MOUNT FOR A FLAT SCREEN & DOME CAMERA

The BT5962 is a CCTV ceiling mount designed for a small to medium-sized dome security camera and a small flat screen display. Available with a 1 or 2 metre ceiling drop, the BT5962 features integrated cable management allowing cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories such as a flat screen can be added with the use of a $\varnothing 38\text{mm}$ accessory collar (BT5952) and compatible screen mount.

SPECIFICATIONS

Recommended screen size	up to 28"
Max. screen load	20kg
Max. camera load	5kg
VESA® screen compatibility	up to 100 x 100
BT5962-FD100 drop length	1036mm
BT5962-FD200 drop length	2036mm
Camera fixing dimensions	51mm to 127.5mm
Colour	White

FEATURES

- 1 Mounts a dome camera and small flat screen to the ceiling
 - 2 Integrated cable management through the top side of the ceiling mount
 - 3 Multiple mounting points for cameras with fixing points up to 127.5mm apart
 - 4 Component range also available for custom installations
- Available in a choice of two different drop lengths
 - Multiple grub screws allow micro-adjustment of the pole to ensure a perfectly angled drop
 - Safety bolts ensure pole and camera mount are securely joined

RECOMMENDED MAX SCREEN	MAX SCREEN LOAD	MAX CAMERA LOAD	MAX VESA	
28" 71cm	20kg	5kg	100 x 100	



BT5963

CCTV CEILING MOUNT FOR A TILTED FLAT SCREEN & DOME CAMERA

The BT5963 is a CCTV ceiling mount designed for a small to medium-sized dome security camera and a small, tilted flat screen display. Available with a 1 or 2 metre ceiling drop, the BT5963 features integrated cable management allowing cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories such as a flat screen can be added with the use of a $\varnothing 38\text{mm}$ accessory collar (BT5952) and compatible screen mount.


SPECIFICATIONS

Recommended screen size	up to 25"
Max screen load	20kg
Max camera load	5kg
Tilt of screen	+17° / -10°
VESA® screen compatibility	up to 100 x 100
BT5963-FD100 drop length	1036mm
BT5963-FD200 drop length	2036mm
Camera fixing dimensions	51mm - 127.5mm
Colour	White

FEATURES

- 1 Mounts a dome camera and small flat screen to the ceiling
- 2 Integrated cable management
- 3 Multiple mounting points for cameras with fixing points up to 127.5mm apart
- 4 Easy tilt adjustment of screen
 - Available in a choice of two different drop lengths
 - Grub screws allow micro-adjustment of pole to get a perfectly angled drop
 - Safety bolts ensure pole and camera mount are securely joined

RECOMMENDED MAX SCREEN	MAX LOAD SCREEN	MAX LOAD CAMERA	MAX VESA	TILT	
75" 190cm	20kg	5kg	100 x 100	10° 17°	



BT5964

CCTV CEILING MOUNT FOR A TILTED FLAT SCREEN & DOME CAMERA

The BT5964 is a CCTV ceiling mount designed for a small to medium-sized dome security camera and a medium sized, tilted flat screen display. Available with a 1 or 2 metre ceiling drop, the BT5964 features integrated cable management allowing cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories such as a flat screen can be added with the use of a $\varnothing 38\text{mm}$ accessory collar (BT5952) and compatible screen mount.


SPECIFICATIONS

Recommended screen size	up to 47"
Max. screen load	25kg
Max. camera load	5kg
Tilt of screen	+ / - 15°
VESA® screen compatibility	up to 200 x 200
BT5964-FD100 drop length	1036mm
BT5964-FD200 drop length	2036mm
Camera fixing dimensions	51mm to 127.5mm
Colour	White

FEATURES

- 1 Mounts a dome camera and medium flat screen to the ceiling
 - 2 Integrated cable management through the top side of the ceiling mount
 - 3 Multiple mounting points for cameras with fixing points up to 127.5mm apart
 - 4 Easy tilt adjustment of screen
- Available in a choice of two different drop lengths
 - Multiple grub screws allow micro-adjustment of the pole to ensure a perfectly angled drop
 - Safety bolts ensure pole and camera mount are securely joined

RECOMMENDED MAX SCREEN	MAX SCREEN LOAD	MAX CAMERA LOAD	MAX VESA	TILT	
47" 120cm	25kg	5kg	200 x 200	15° 15°	



BT5964-FD100
1 metre length

BT5964-FD200
2 metre length

Hosh

BT5965

CCTV CEILING MOUNT WITH NPT ADAPTER

The BT5965 is a ceiling mount designed to fix equipment such as CCTV cameras using an NPT standard 1.5" thread. Available with a 1 or 2 metre ceiling drop, the BT5965 features integrated cable management allowing cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories such as a flat screen can be added with the use of a $\varnothing 38\text{mm}$ accessory collar (BT5952) and compatible screen mount.

SPECIFICATIONS

Max load	25kg
BT5965-FD100 drop length	1067mm
BT5965-FD200 drop length	2067mm
Colour	White

FEATURES

- 1 Mount an NPT 1.5" compatible accessory to the ceiling
 - 2 Integrated cable management through the top side of the ceiling mount
 - 3 Safety bolts ensure pole and adaptor are securely joined
 - 4 Component range also available for custom installations
- Available in a choice of two different drop lengths
 - Multiple grub screws allow micro-adjustment of the pole to ensure a perfectly angled drop



BT5965-FD100
1 metre length

BT5965-FD200
2 metre length



SYSTEM VTM

Ceiling Mounts

for Flat Screens



Complete mounting solutions designed to seamlessly install security cameras, flat screens, and CCTV systems in various public spaces, including retail, transportation, corporate, government, and leisure environments

Constructed using System V components, we have created a range of ready-made ceiling mount kits designed to cover some of our most popular installations. These kits offer options for pole mounting a small to medium-sized flat screen. Tailored for use with System V's Ø38mm poles, these solutions are available in two lengths, utilising either a 1m, 2m or adjustable drop length pole.

For a more custom approach, individual components within the System V range are available (See page 5). Poles can be joined together for an extended ceiling drop, and an adaptor is offered to enable the use of these components with B-Tech's versatile System 2 range. This flexibility allows CCTV installations onto I-Beams, Purlins, and Truss systems.

For complete product specifications, including technical drawings and colour options, scan each products QR code to view the online page.



Key Features

- Complete mounting kits to mount a screen
- Available in a choice of two different drop lengths and adjustable drop length
- Multiple grub screws allow micro-adjustment of the pole to ensure a perfectly angled drop
- Includes cover plates for a smart installation
- Integrated cable management allows cables to pass through the centre of the pole
- Components are also available to order individually

Flat Screen Ceiling Mounts



BT5970

FLAT SCREEN CEILING MOUNT FOR VESA 100 SCREENS

The BT5970 is a flat screen ceiling mount designed for screens up to 28" / 20kg. Available with a 1 or 2 metre ceiling drop, the BT5970 features integrated cable management allowing cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories can be added with the use of additional ø38mm accessory collars (BT5952) and compatible accessory mounts.

SPECIFICATIONS

Recommended screen size	up to 28"
Max. screen load	20kg
VESA® screen compatibility	up to 100 x 100
BT5970-FD100 drop length	1019mm*
BT5970-FD200 drop length	2019mm*
Colour	White


FEATURES

- 1 Mounts a small flat screen to the ceiling
 - 2 Integrated cable management through the top or side of the mount
 - 3 Grub screws to micro-adjust the pole to ensure a perfectly angled drop
 - 4 Component range also available for custom installations
- Available in a choice of two different drop lengths
 - Safety bolts ensure pole and mount are securely joined

RECOMMENDED MAX SCREEN	MAX LOAD	MAX VESA	
28" 71cm	20kg	100 x 100	

BT5970-FD100
1 metre length

BT5970-FD200
2 metre length



BT5971

FLAT SCREEN CEILING MOUNT WITH TILT FOR VESA 100 SCREENS

The BT5971 is a flat screen ceiling mount with tilt adjustment, designed for screens up to 28" / 20kg. Available with a 1 or 2 metre ceiling drop, the BT5971 features integrated cable management allowing cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories can be added with the use of additional $\varnothing 38\text{mm}$ accessory collars (BT5952) and compatible accessory mounts.


SPECIFICATIONS

Recommended screen size	up to 28"
Max. screen load	20kg
VESA® screen compatibility	up to 100 x 100
Tilt	+17° / -10°
BT5970-FD100 drop length	1019mm*
BT5970-FD200 drop length	2019mm*
Colour	White

FEATURES

- 1 Mounts a small flat screen to the ceiling
 - 2 Integrated cable management through the top or side of the mount
 - 3 Grub screws to micro-adjust the pole to ensure a perfectly angled drop
 - 4 Easy tilt adjustment of screen
- Available in a choice of two different drop lengths
 - Safety bolts ensure pole and mount are securely joined

RECOMMENDED MAX SCREEN	MAX LOAD	MAX VESA	TILT	
28" 71cm	20kg	100 x 100	10° 17°	



BT5971-FD100
1 metre length

BT5971-FD200
2 metre length



BT5972

FLAT SCREEN CEILING MOUNT WITH TILT FOR VESA 200 SCREENS

The BT5972 is a flat screen ceiling mount with tilt adjustment, designed for screens up to 47" / 25kg. Available with a 1 or 2 metre ceiling drop, the BT5972 features integrated cable management allowing cables to run through the centre of the pole and out through either the top or side of the ceiling mount, ensuring finished installations are neat and tidy. For longer drops, the pole length can be extended with a joiner (BT5924) and additional poles (BT5935) from the System V Range, whilst accessories can be added with the use of additional $\varnothing 38\text{mm}$ accessory collars (BT5952) and compatible accessory mounts.

SPECIFICATIONS

Recommended screen size	up to 47"
Max. screen load	25kg
VESA® screen compatibility	up to 200 x 200
Tilt	+/-40°
BT5970-FD100 drop length	1019mm*
BT5970-FD200 drop length	2019mm*
Colour	White


FEATURES

- 1 Mounts a medium size flat screen to the ceiling
 - 2 Integrated cable management through the top or side of the mount
 - 3 Grub screws to micro-adjust the pole to ensure a perfectly angled drop
 - 4 Easy tilt adjustment of screen
- Available in a choice of two different drop lengths
 - Safety bolts ensure pole and mount are securely joined

BT5972-FD100
1 metre length

BT5972-FD200
2 metre length

RECOMMENDED MAX SCREEN	MAX LOAD	MAX VESA	TILT	
47" 120cm	25kg	200 x 200	40° 40°	



Surveillance & Security Mounting Solutions								
Model Number	Mount	Max Camera Weight	Camera Fixings	Max Screen Weight	Screen VESA	Recommended Screen Size	Screen Tilt	Ceiling Drop
BT5960-FD	Camera	5kg	51.5mm - 127.5mm	N/A	N/A	N/A	N/A	1m / 2m
BT5960-AD	Camera	5kg	51.5mm - 127.5mm	N/A	N/A	N/A	N/A	833-1472mm
BT5961-FD	Camera	5kg	51.5mm - 251.5mm	N/A	N/A	N/A	N/A	1m / 2m
BT5961-AD	Camera	5kg	51.5mm - 251.5mm	N/A	N/A	N/A	N/A	833-1472mm
BT5962-FD	Camera and Screen	5kg	51.5mm - 127.5mm	20kg	100	10"-28"	N/A	1m / 2m
BT5962-AD	Camera and Screen	5kg	51.5mm - 127.5mm	20kg	100	10"-28"	N/A	833-1472mm
BT5963-FD	Camera and Screen	5kg	51.5mm - 127.5mm	20kg	100	10"-28"	+17°/-10°	1m / 2m
BT5963-AD	Camera and Screen	5kg	51.5mm - 127.5mm	20kg	100	10"-28"	+17°/-10°	833-1472mm
BT5964-FD	Camera and Screen	5kg	51.5mm - 127.5mm	25kg	200	22"-47"	+/-40°	1m / 2m
BT5964-AD	Camera and Screen	5kg	51.5mm - 127.5mm	25kg	200	22"-47"	+/-40°	833-1472mm
BT5965-FD	Camera	25kg	NPT (1.5")	N/A	N/A	N/A	N/A	1m / 2m
BT5965-AD	Camera	25kg	NPT (1.5")	N/A	N/A	N/A	N/A	833-1472mm
BT5970-FD	Screen	N/A	N/A	20kg	100	10"-28"	N/A	1m / 2m
BT5970-AD	Screen	N/A	N/A	20kg	100	10"-28"	N/A	833-1472mm
BT5971-FD	Screen	N/A	N/A	20kg	100	10"-28"	+17°/-10°	1m / 2m
BT5971-AD	Screen	N/A	N/A	20kg	100	10"-28"	+17°/-10°	833-1472mm
BT5972-FD	Screen	N/A	N/A	25kg	200	22"-47"	+/-40°	1m / 2m
BT5972-AD	Screen	N/A	N/A	25kg	200	22"-47"	+/-40°	833-1472mm

SYSTEM X

Surveillance Room Solutions from B-Tech



As well as our comprehensive range of security camera mounting solutions, B-Tech also offers an extensive range of multi-screen mounting solutions ideal for surveillance and control room applications.

The System X range is made up of a selection of core components that allow an almost endless number of different installation configurations. Solutions can be assembled as freestanding, mobile or bolt-down floor stands, fixed to a wall, suspended from a ceiling, or mounted to a desktop. A range of mounting interfaces allows screens of varying sizes to be used as part of the same configuration, in both portrait or landscape orientations.



Premium UC / VC Floor Stands

Includes Single Screen, Twin Screen & XL Screen Options



As well as our comprehensive range of security camera mounting solutions, B-Tech also offers an extensive range of multi-screen mounting solutions ideal for personal and professional use.

Designed for VC, broadcast and control room applications, the Mode-AL range of premium floor stands includes freestanding, bolt-down, floor-to-wall, and floor-to-ceiling mounted displays. A range of kits for common single and twin screen requirements are available as standard whilst customised solutions for multi-screen setups are possible from our range of stocked parts.



Mode-AL stands can be easily customised with the addition of VC camera shelves and media storage trays.



United Kingdom
+44 (0)1327 300 787

uk@btechavmounts.com

Belgium
+32 (0)2 720 9271

europe@btechavmounts.com

Germany
+49 (0)3322 50 792 50

DACH@btechavmounts.com

Spain
+34 93 640 24 79

iberia@btechavmounts.com

Americas
+1 888 792 8188

americas@btechavmounts.com

MEAI
+65 3159 1604

meai@btechavmounts.com

Singapore
+65 3159 1604

apac@btechavmounts.com

China
(+86) 574 8810 3861

china@btechavmounts.com

South Korea
+82 (0) 2 862 3165

Korea@btechavmounts.com

Vietnam
+84 (0)24 3201 3418

vietnam@btechavmounts.com

For full details of all B-Tech offices, please visit www.btechavmounts.com/contact-us or scan here:



© 2024 October B-Tech AV Mounts Corporation Ltd. All rights reserved.

The information in this brochure reflects the current technical specifications at the time of print. We reserve the right to change the technical or physical specifications without prior notice. System X, is a trademarks of B-Tech International Design & Manufacturing Ltd., B-Tech AV Mounts and the B-Tech logo, are all registered trademarks. All B-Tech images and symbols are exclusive property of B-Tech International Design & Manufacturing Ltd. All other brands and products are trademarks of their respective owners. B-Tech accept no liability for loss or damage caused by improper installation or mounting on unstable structures.

E&OE.

Disclaimer

B-Tech security fasteners are designed as a security deterrent only. B-Tech, B-Tech distributors & B-Tech resellers accept no liability for loss or resulting costs incurred from the theft, attempted theft or unauthorised removal of any item(s) mounted using B-Tech security fasteners. Security screw removal tools are widely available & all B-Tech security fasteners are intended as a deterrent to the opportunist thief only.

B-Tech AV Mounts is part of the



GLOBAL MOUNTS GROUP

www.globalmountsgroup.com



Designed & Engineered
in the UK

CASAM-2024-V1-021024-ENG

www.btechavmounts.com

info@btechavmounts.com